



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

PHF 99593  
LS

10836 U.S. PRO  
09/610712



**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

99402594.8

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**I.L.C. HATTEN-HECKMAN**

DEN HAAG, DEN  
THE HAGUE,    08/06/00  
LA HAYE, LE

**THIS PAGE BLANK (USPTO)**

NO. 123456789  
RECEIVED JAN 10 1991



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.: 99402594.8  
Application no.:  
Demande n°:

Anmeldetag: 20/10/99  
Date of filing:  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
Koninklijke Philips Electronics N.V.  
5621 BA Eindhoven  
NETHERLANDS

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:

Method for defining the structure of a video sequence

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

**THIS PAGE BLANK (USPTO)**

**«METHOD FOR DEFINING THE STRUCTURE OF A VIDEO SEQUENCE»****FIELD OF THE INVENTION**

The invention relates to a method for defining in a hierarchical fashion the structure of a video sequence that corresponds to successive frames. The invention also relates to a method for indexing data that includes said definition method, to a device for carrying out said indexing method, and to an image retrieval system also implementing said method. This invention will be very useful in relation with the MPEG-7 standard.

**BACKGROUND OF THE INVENTION**

The future MPEG-7 standard is intended to specify a standard set of descriptors that can be used to describe various types of multimedia information. The description thus associated with a given content allows fast and efficient searching for material of a user's interest. The invention relates more specifically to the case of representation of video sequences.

A video indexing technique is described for instance in the document "Automatic video indexing via object motion analysis", J.D. Courtney, Pattern Recognition, volume 30, number 4, April 1997, pp.607-625. As explained in said document, the logical organization of video sequences may be determined by means of a hierarchical segmentation, in the same manner a text is subdivided into chapters, paragraphs and sentences.

**SUMMARY OF THE INVENTION**

It is an object of the invention to propose a method that is able to automatically create the description of a video sequence, that is to say a table of contents of said sequence, on the basis of a new, specific criterion.

To this end, the invention relates to a method such as described in the introductory paragraph of the description and which moreover comprises :

(1) a shot detection step, provided for detecting the boundaries between consecutive shots, a shot being a set of contiguous frames without editing effects ;

(2) a sub-division step, provided for splitting each shot into sub-entities, called micro-segments ;

(3) a clustering step, provided for creating the final hierarchical structure of the processed video sequence.

Such a method allows to split each shot of the processed video sequence into sub-entities, here called micro-segments. Preferably, these micro-segments present, according to the proposed criterion, a high level of homogeneity on the motion parameters of the camera with which the original images have been captured (these

images then having been converted into a video bitstream constituting said processed video sequence).

More precisely, the homogeneity of each micro-segment is computed on a motion histogram, each bin of which shows the percentage of frames of the sequence with a specific type of motion.

A micro-segment is perfectly homogeneous when it presents a single combination of camera motion parameters along all its frames, the histogram bins then being equal to 1 or 0. On the contrary, if the bins of the histogram are not equal to either 1 or 0, i.e. present intermediate values indicating that a micro-segment is not perfectly homogeneous, in order to segment a shot, a distance between two segments is computed, based on the homogeneity of the segments union, said homogeneity being itself deduced from the histogram of a micro-segment and the different motion types, the homogeneity of a shot being equal to the homogeneity of its micro-segments weighted by the length of each of them, a fusion between any pair of segments being decided or not according to the value of the homogeneity of the shot with respect to a predefined threshold  $T(H)$  and assuming that the selected segments have already been merged, and such a possible merging process between micro-segments ending when there is no pair of neighbouring micro-segments that can be merged.

It is another object of the invention to propose a video indexing device including means for carrying out such a method and associated indexing means for adding a label to each element of the hierarchical structure defined thanks to this method.

It is still another object of the invention to propose an image retrieval system including such a video indexing device and associated means for performing on the basis of the categorization issued from said indexing operation any image retrieval using one or several features of this image.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described, by way of example, with reference to the accompanying drawings in which :

- Fig.1 shows a block diagram of the definition method according to the invention ;
- Fig.2 illustrates an example of mDFD curve for a given sequence of frames ;
- Fig.3 shows an example of histogram illustrating the measure of the segment homogeneity ;
- Fig.4 illustrates the process of initial oversegmented partition creation ;
- Fig.5 shows a binary tree such as created by implementation of a shot merging sub-step provided in the definition method according to the invention ;

- Fig.6 shows the tree yielded after a tree restructuring sub-step ;
- Fig.7 illustrates a method for indexing data that have been processed according to the invention ;
- Fig.8 illustrates an image retrieval system implementing said indexing method and allowing, thanks to appropriate associated means, to perform an image retrieval based on the categorization issued from such an indexing operation.

## DETAILED DESCRIPTION OF THE INVENTION

The goal of a table of contents for a video sequence is to define the structure of this sequence in a hierarchical fashion, like in a text document. The original sequence is therefore subdivided into sub-sequences which can also be divided into shorter sub-sequences. At the end of this division process, the shortest entity to be described will be the micro-segment.

More precisely, the method according to the proposed strategy is divided into three steps, which are, as shown in Fig.1 : a shot detection step (in a sequence of pictures, a video shot is a particular sequence which shows a single background), a segmentation step of the detected shots, and a shot clustering step. These three steps 11, 12, 13 will now be described in a more detailed manner.

The first step 11 is provided for splitting the video sequence into shots constituting the input data for the next steps. As a shot is a set of contiguous frames without editing effects, this step must allow to detect the transitions between consecutive shots, which is made by means of two main sub-steps : a computation sub-step 111, allowing to determine a mean Displaced Frame Difference (mDFD) curve, and a segmentation sub-step 112.

The mDFD curve computed during the sub-step 111 is obtained taking into account both luminance and chrominance information. With, for a frame at time  $t$ , the following definitions :

$$\text{luminance } Y = \{f_k(i, j, t)\}_{k=Y} \quad (1)$$

$$\text{chrominance components } (U, V) = \{f_k(i, j, t)\}_{k=U, V} \quad (2)$$

the DFD is given by :

$$\text{DFD}_k(i, j ; t-1, t+1) = f_k(i, j, t+1) - f_k(i-d_x(i, j), j-d_y(i, j), t-1) \quad (3)$$

and the mDFD by :

$$\text{mDFD}(t) = \frac{1}{I_x I_y} \sum_k^{Y, U, V} w_k \sum_{i, j}^{I_x, I_y} |\text{DFD}_k(i, j ; t-1, t+1)| \quad (4)$$

where  $I_x, I_y$  are the image dimensions and  $w$  the weights for  $Y, U, V$  components. An example of the obtained curve, showing ten shots  $s_1$  to  $s_{10}$ , is illustrated in Fig.2 with weights that have been for instance set to  $\{w_Y, w_U, w_V\} = \{1, 3, 3\}$ . The transitions

between consecutive shots can be abrupt changes from one frame to the following one, or more sophisticated, like dissolves, fades, and wipes : the highest peaks of the curve correspond to the abrupt transitions (frames 21100, 21195, 21633, 21724), while, on the other side, the oscillation from frame 21260 to frame 21279 corresponds to a dissolve and the presence of large moving foreground objects in frames 21100-21195 and 21633-21724 creates high level oscillations of the mDFD curve.

The sub-step 112, provided for detecting the video editing effects and segmenting the mDFD curve into shots, uses a threshold-based segmentation to extract the highest peaks of the mDFD curve (or another type of mono-dimensional curve). Such a technique is described for instance in the document "Hierarchical scene change detection in an MPEG-2 compressed video sequence", T.Shin and al, Proceedings of the 1998 IEEE International Symposium on Circuits and Systems, ISCAS'98, vol.4, March 1998, pp.253-256.

The second step 12 is a temporal segmentation provided for splitting each detected shot into sub-entities called micro-segments. This segmentation step, applied to each detected shot separately, consists of two sub-steps : an oversegmentation sub-step 121, intended to dividing each shot into so-called microsegments which must show a perfect homogeneity, and a merging sub-step 122.

In order to carry out the first sub-step 121, it is necessary to define first what will be called a distance, allowing to compare the microsegments, and also a parameter allowing to assess the quality of a microsegment or a partition (= a set of microsegments). In both cases, a motion histogram, in which each one of the bins shows the percentage of frames with a specific type of motion and defined as indicated by the following relation (5), is used :

$$H_s [i] = \frac{N_i}{L_s} \quad (5)$$

where  $s$  represents the label of the concerned segment inside the shot,  $i$  the motion type (these motions are called trackleft, trackright, boomdown, boomup, tiltleft, tiltup, panleft, panright, rolleft, rolright, zoomin, zoomout, fixed),  $L_s$  the length of the segment  $s$ , and  $N_i$  the number of frames of the segment  $s$  with motion type  $i$  (it is possible that  $\sum H_s [i] > 1$ , since different motions can appear concurrently).

A segment is assumed to be perfectly homogeneous when it presents a single combination of camera motion parameters along all its frames, or to be not homogeneous when it presents important variations on these parameters. The segment homogeneity is computed on its histogram (relation (5)) : if a segment is perfectly homogeneous, the histogram bins are equal to either 1 or 0, while if it is not, the bins can present intermediate values. The measure of the segment homogeneity is then obtained by measuring how much its histogram differs from the ideal one (i.e. it is computed how



much the bins of the histogram differ from 1 or 0). The distance corresponding to bins with high values is the difference between the bin value and 1 ; analogously, for bins with small values, the distance is the bin value itself. An example of histogram is shown in Fig.3 : two motion types introduce some error because the motion does not appear in all the frames of the segment (panleft PL and zoomin ZI), and two other ones (boomdown BD and rollright RR) introduce some error for the opposite reason.

Mathematically, the homogeneity of a segment  $s$  is given by the relation (6) :

$$H(s) = \sum_i e(i) \quad (6)$$

where :  $e(i) = 1 - H_s[i]$  if  $H_s[i] \geq 0,5$   
 $e(i) = H_s[i]$  if  $H_s[i] < 0,5$   
 $H_s[i]$  = histogram of the segment  $s$   
 $i$  = motion type.

The homogeneity of a shot  $S$  is then equal to the homogeneity of its segments, weighted by the length of each of them, as illustrated by the following equation (7) :

$$H(S) = \frac{1}{L(S)} \cdot \sum_{j=1}^{j=N} L_j \cdot H(s_j) \quad (7)$$

where  $L(S) = \sum_{j=1}^N L_j$  is the total length of the shot  $S$  and  $N$  is the number of segments

said shot contains (it may be noted that small values of  $H(S)$  correspond to high levels of homogeneity). The distance between two segments  $s_1$  and  $s_2$  is then the homogeneity of the segments union :

$$d(s_1, s_2) = H(s_1 \cup s_2) \quad (8)$$

The temporal segmentation can now be resumed. The initial oversegmentation sub-step 121 allows to oversegment the concerned shot in order to obtain a set of perfectly homogeneous microsegments, which corresponds to the following relation (9) :

$$H(s) = 0, \text{ whatever } s \text{ included in } S \quad (9)$$

An example of how to obtain this initial oversegmented partition is shown in Fig.4, with motion types panleft (PL), zoomout (ZO) and fixed (FIX),  $s_1$  to  $s_7$  designating the segments (camera motion parameters may be unknown for some frames : in this example, the last frames of the shot - the segment  $s_7$  - do not have any parameter associated).

The merging sub-step 122 comprises the following operations : a computation operation 1221, in which the distance between all neighbouring segments (temporally connected) is computed using the equation (8) for selecting the closest pair

of segments (for possible merging during the next operation), and a fusion decision operation 1222, in which, in order to decide if the selected pair of segments will be merged, the homogeneity of the shot (according to the equation (7)) is computed, assuming that the minimum distance segments have already been merged. The following fusion criterion is applied :

merge if  $H(S) \leq \text{threshold } T(H)$

do not merge if  $H(S) > \text{threshold } T(H)$

(this fusion criterion is global : the decision depends on the homogeneity of the resulting partition, and not exclusively on the homogeneity of the resulting segment). If the merging is done, a new iteration starts at the level of the second sub-step (a second computation operation 1221 is carried out, and so on...). The merging process ends when there is no pair of neighbouring segments that can still be merged.

The third step 13 - a shot clustering step - is divided into two sub-steps : a shot merging sub-step 131, in which pairs of shots are grouped together for creating a binary tree, and a tree structuring sub-step 132, for restructuring said binary tree in order to reflect the similarity present in the video sequence.

The shot merging sub-step 131 is provided for yielding a binary tree which represents the merging order of the initial shots : the leaves represent these initial shots, the top node the whole sequence, and the intermediate nodes the sequence that are created by the merging of several shots. The merging criterion is defined by a distance between shots, and the closest shots are first merged. In order to compute the distance between shots, it is necessary to define a shot model providing the features to be compared and to set the neighbourhood links between them (which indicate what merging can be done). The process ends when all the initial shots have been merged into a single node or when the minimum distance between all couples of linked nodes is greater than a specified threshold.

The shot model must obviously allow to compare the content of several shots, in order to decide what shots must be merged and which is their merging order. In still images, luminance and chrominance are the main features of the image, while in a video sequence motion is an importance source of information due to the temporal evolution. So, average images, histograms of luminance and chrominance information (YUV components) and motion information will be used to model the shots.

For implementing the shot merging sub-step 131, it is necessary to carry out the following operations : (a) to get a minimum distance link (operation 1311), (b) to check a distance criterion (operation 1312) ; (c) to merge nodes (operation 1313) ; (d) to update links and distances (operation 1314) ; (e) to check the top node (operation 1315).

In the operation 1311, both the minimum and the maximum distance are computed for every pair of linked nodes. The maximum distance is first checked : if it is higher than a maximum distance threshold  $d(\text{max})$ , the link is discarded, otherwise the

link is taken into account. Once all links have been scanned, the minimum distance is obtained.

5 In the operation 1312, in order to decide if the nodes pointed by the minimum distance link must be merged, the minimum distance is compared to a minimum distance threshold  $d(\min)$  : if it is higher than said threshold, no merging is performed and the process ends, otherwise pointed nodes are merged and the process goes on.

10 In the operation 1313, nodes pointed by the minimum distance links are merged. In the operation 1314, said links are updated to take into account the merging that has been done and, once links have been updated, the distance of those links which point to the new node is recomputed. In the final operation 1315, the number of remaining nodes is checked : if all initial shots have been merged into a single node, the process ends, otherwise a new iteration begins.

15 The shot merging sub-step 131 may yield a single tree if all the initial shots are similar enough or a forest if initial shots are quite different. An example of binary tree for the creation of a table of contents is shown in Fig.5. Inside the leaf nodes of this tree, its label and, between brackets, the starting and ending frame numbers of the shot have been indicated ; inside the remaining nodes, the label, the fusion order (between parenthesis) and the minimum and maximum distance between its two siblings.

20 The tree restructuring sub-step 132 is provided for restructuring the binary tree obtained in the sub-step 131 into an arbitrary tree that should reflect more clearly the video structure. To this end, it is decided to remove the nodes that have been created by the merging process but that do not convey any relevant information, said removal being done according to a criterion based on the variation of the similarity degree (distance) between the shots included in the node :

- if the analyzed node is the root node (or one of the root nodes if various binary trees have been obtained after the merging process), then the node should be preserved and appear in the final tree ;
  - if the analyzed node is a leaf node (i.e. corresponds to an initial shot), then
- 30 it has also to remain in the final tree ;
- otherwise, the node will be kept in the final tree only if the following conditions (10) and (11) are satisfied :

$$|d(\min)[\text{analyzed node}] - d(\min)[\text{parent node}]| < T(H) \quad (10)$$

$$|d(\max)[\text{analyzed node}] - d(\max)[\text{parent node}]| < T(H) \quad (11)$$

35 As shown in Fig.6, the tree resulting from the restructuring sub-step 132 represents more clearly the structure of the video sequence : nodes in the second level of the hierarchy

(28, 12, 13, 21) represent the four scenes of the sequence, while nodes in the third (or occasionally in the fourth) level represent the initial shots.

5 The invention is not limited to the implementation described above, from which modifications or broader applications may be deduced without departing from the scope of the invention. For instance the invention also relates to a method for indexing data that have been processed according to the previously described method. Such a method, illustrated in Fig.7, comprises a structuring step 71, carrying out a sub-division of each processed sequence into consecutive shots and the splitting of each of the obtained  
10 shots into sub-entities (or micro-segments), and a clustering step 72, creating the final hierarchical structure. These steps 71 and 72, respectively similar to the steps 11-12 and to the step 13 previously described, are followed by an additional indexing step 73, provided for adding a label to each element of the hierarchical structure defined for each processed video sequence.

15 The invention also relates to an image retrieval system such as illustrated in Fig.8, comprising a camera 81, for the acquisition of the video sequences (available in the form of sequential video bitstreams), a video indexing device 82, for carrying out said data indexing method (said device captures the different levels of content information in said sequences by analysis, hierarchical segmentation), and indexing on the basis of the categorization resulting from said segmentation), a database 83 that stores the data  
20 resulting from said categorization (these data, sometimes called metadata, will allow the retrieval or browsing step then carried out on request by users), a graphical user interface 84, for carrying out the requested retrieval from the database, and a video monitor 85 for displaying the retrieved information (the invention also relates, obviously, to the video indexing device 82, that allows to implement the method according to the  
25 invention).

## CLAIMS :

1. A method for defining in a hierarchical fashion the structure of a video sequence that corresponds to successive frames, comprising the following steps :

(1) a shot detection step, provided for detecting the boundaries between consecutive shots, a shot being a set of contiguous frames without editing effects ;

(2) a sub-division step, provided for splitting each shot into sub-entities, called micro-segments ;

(3) a clustering step, provided for creating the final hierarchical structure of the processed video sequence.

2. A method according to claim 1, wherein said shot detection step uses a similarity criterion based on a computation of the mean displaced frame difference curve and the detection of the highest peaks of said curve.

3. A method according to anyone of claims 1 and 2, wherein said sub-division step uses a criterion involving the level of homogeneity on the motion parameters of the camera used to generate the processed video sequence.

4. A method according to claim 3, wherein the homogeneity of a micro-segment is computed on a motion histogram, each bin of which shows the percentage of frames with a specific type of motion.

5. A method according to claim 4, wherein, if the bins of the histogram are not equal to either 1 or 0, i.e. present intermediate values indicating that a micro-segment is not perfectly homogeneous, in order to segment a shot, a distance between two segments is computed, based on the homogeneity of the segments union, said homogeneity being itself deduced from the histogram of a micro-segment and the different motion types, the homogeneity of a shot being equal to the homogeneity of its micro-segments weighted by the length of each of them, a fusion between any pair of segments being decided or not according to the value of the homogeneity of the shot with respect to a predefined threshold  $T(H)$  and assuming that the selected segments have already been merged, and such a possible merging process between micro-segments ending when there is no pair of neighbouring micro-segments that can be merged.

6. A method for indexing data available in the form of a video sequence that corresponds to successive frames, comprising the following segmentation steps :

(1) a structuring step, provided for sub-dividing said sequence into consecutive shots and splitting each of said shots into sub-entities called micro-segments ;

(2) a clustering step, provided for creating on the basis of said segmentation a final hierarchical structure of the processed video sequence ;

(3) an indexing step, provided for adding a label to each element of said hierarchical structure.

7. A video indexing device including means for carrying out a method according to claim 6.

8. An image retrieval system including :

5 (1) means for carrying out a method according to claim 6, for defining in a hierarchical fashion the structure of a video sequence that corresponds to successive frames and giving an indexing label to each element of the hierarchical structure thus defined and storing said labels ;

(2) means for performing on the basis of the stored labels any image retrieval using one or several features of said image to be retrieved.

**Abstract**

The invention relates to a method intended to automatically create a description of a video sequence - i.e. its table of contents -, by means of an analysis of said sequence. The main step of said method is a temporal segmentation of the video shots of the sequence, using camera motion parameters. This segmentation uses a similarity criterion involving, for sub-entities of each shot, the level of homogeneity of these sub-entities on the motion parameters of the camera used to acquire the original images and generate the bitstream constituting the processed sequence.

5

10

Fig.2

**THIS PAGE BLANK (USPTO)**



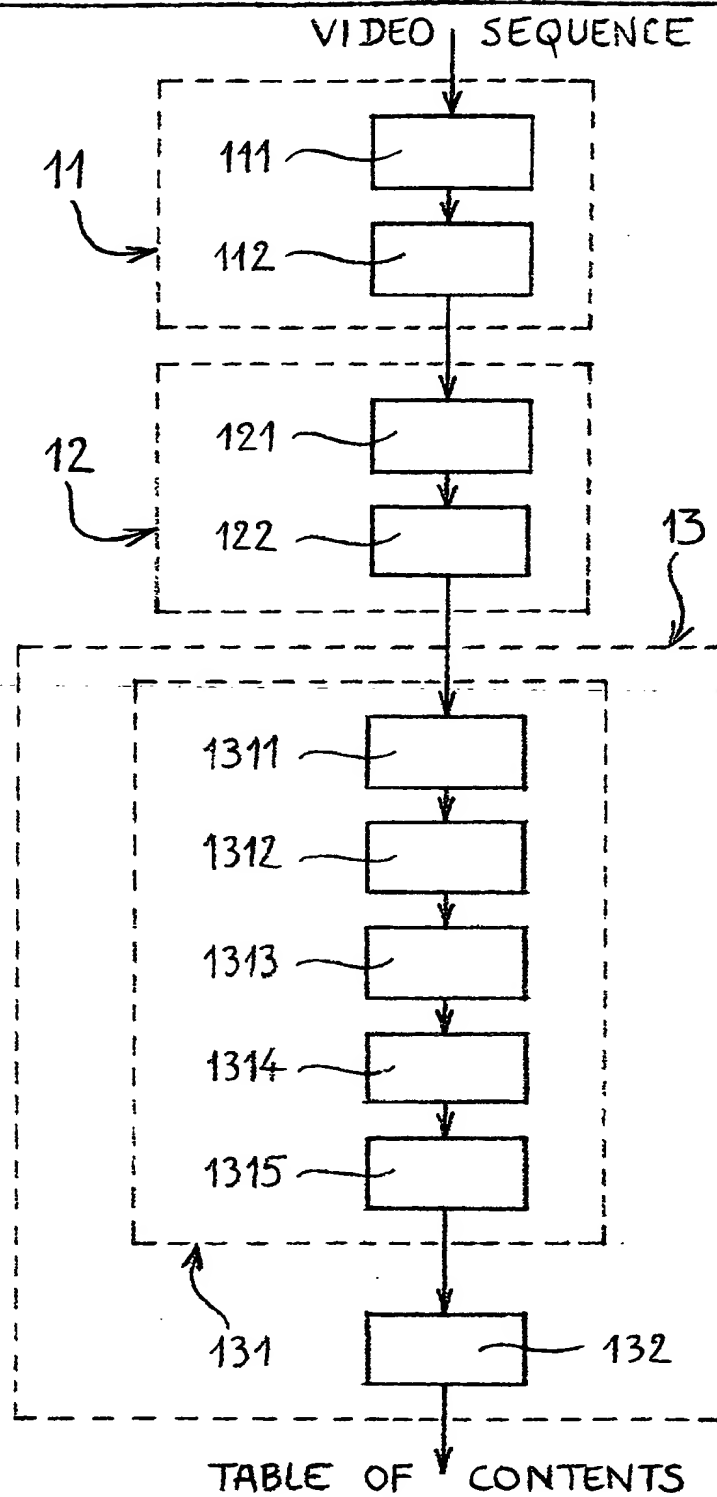


FIG. 1

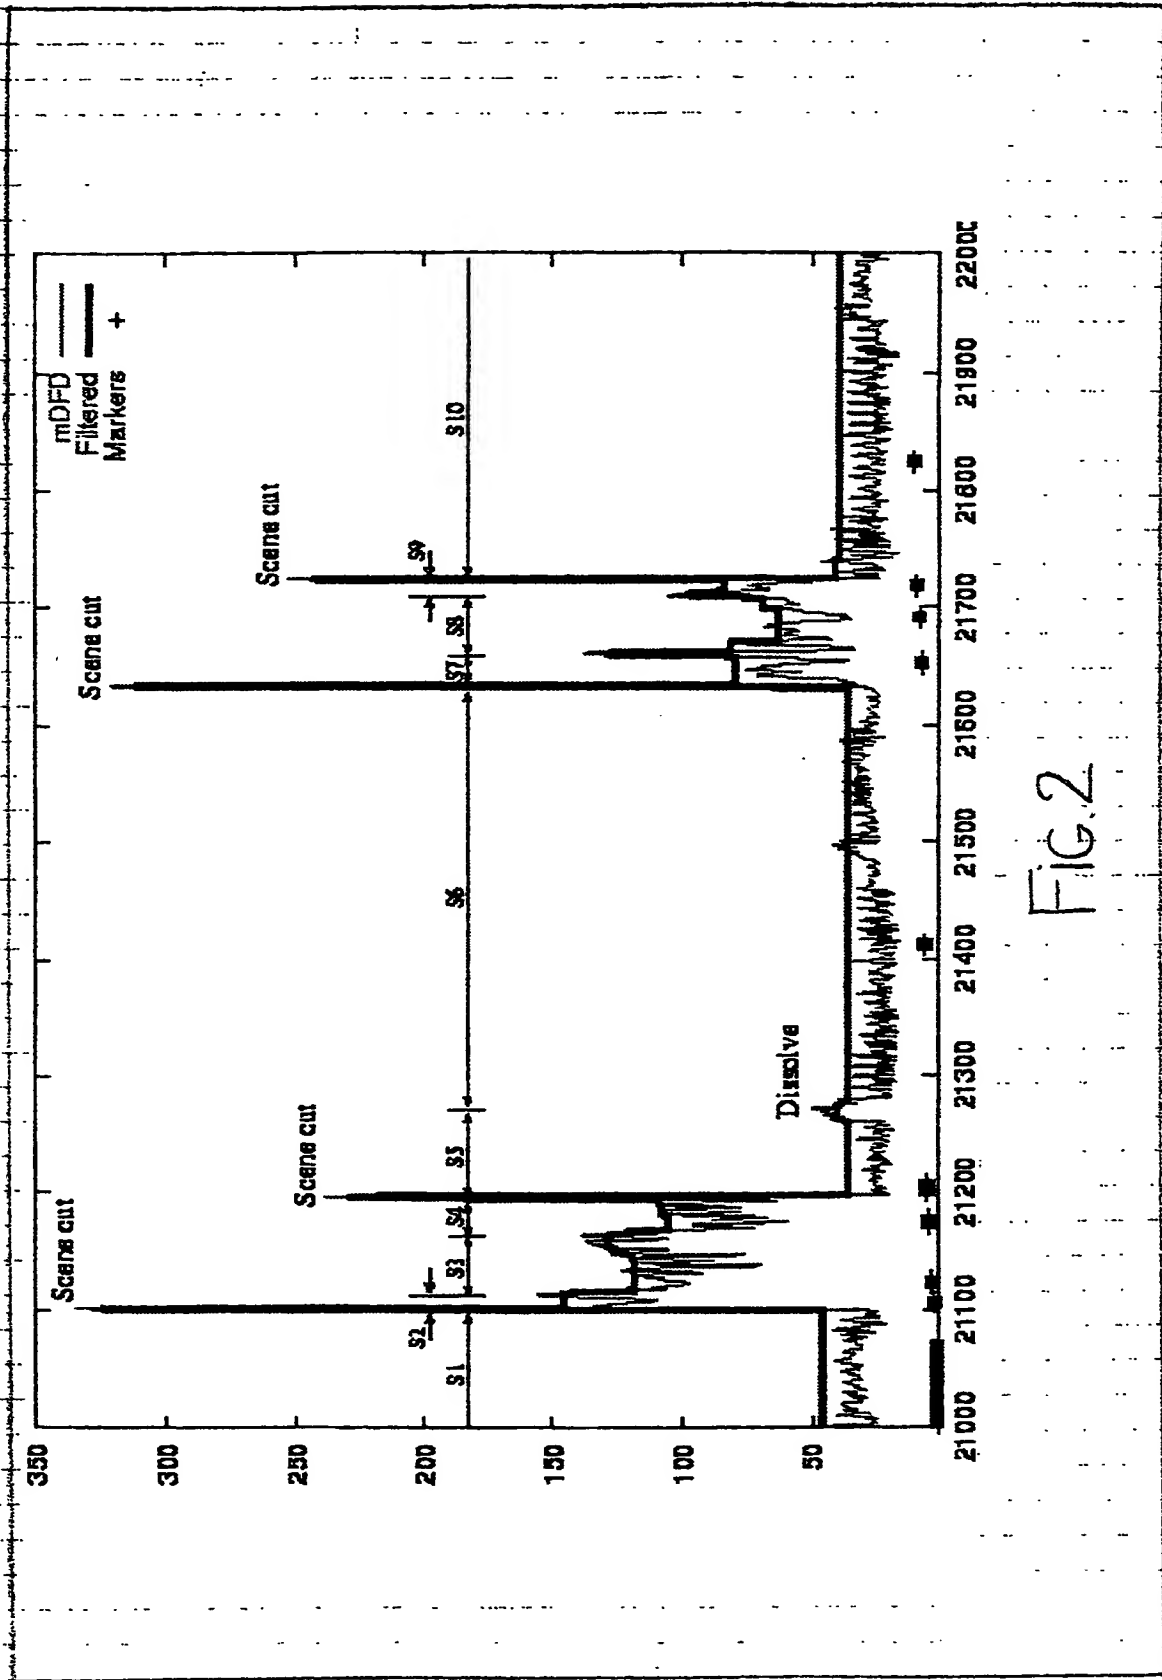


FIG.2

## Motion Presence

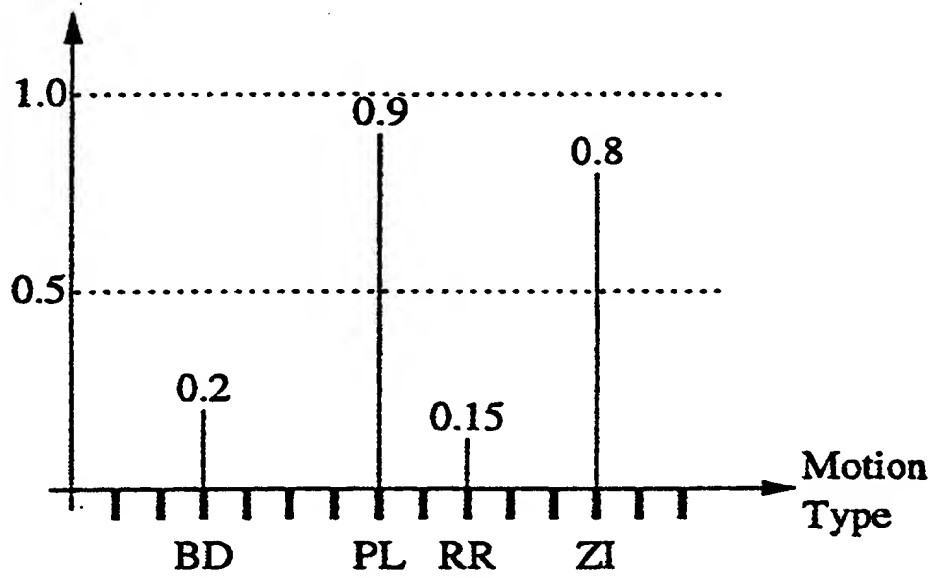


FIG.3

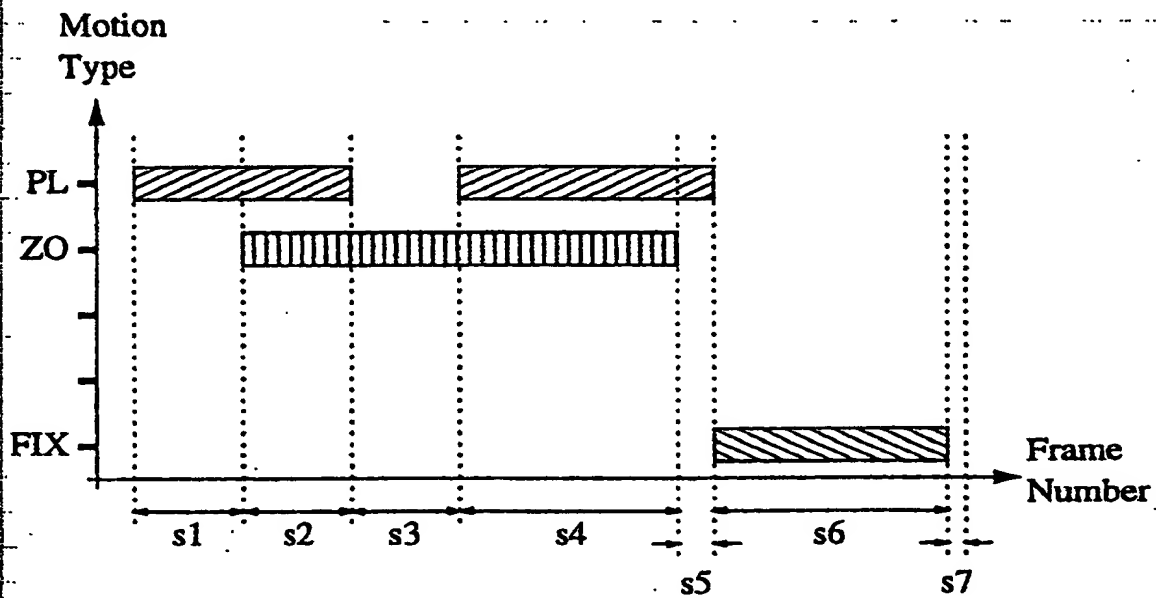


FIG.4

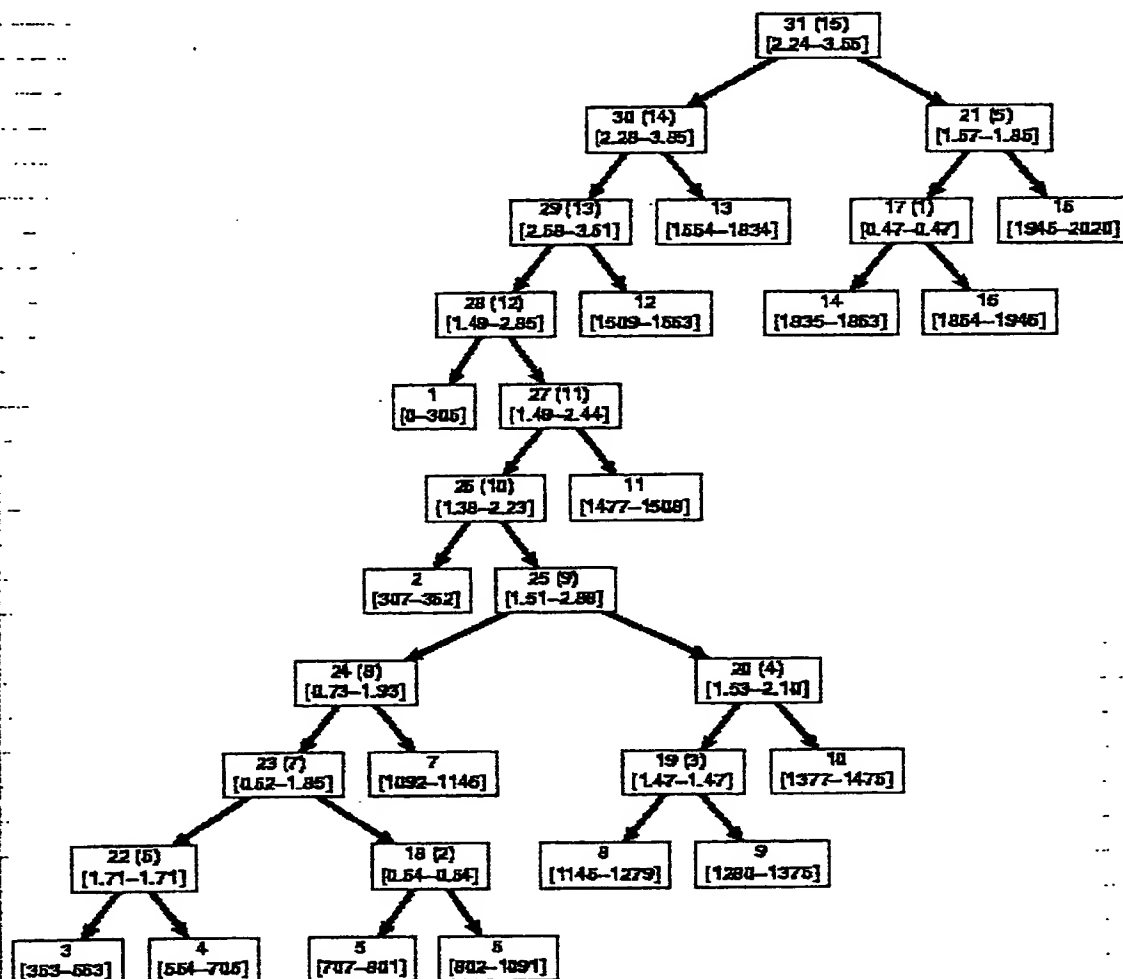


FIG.5


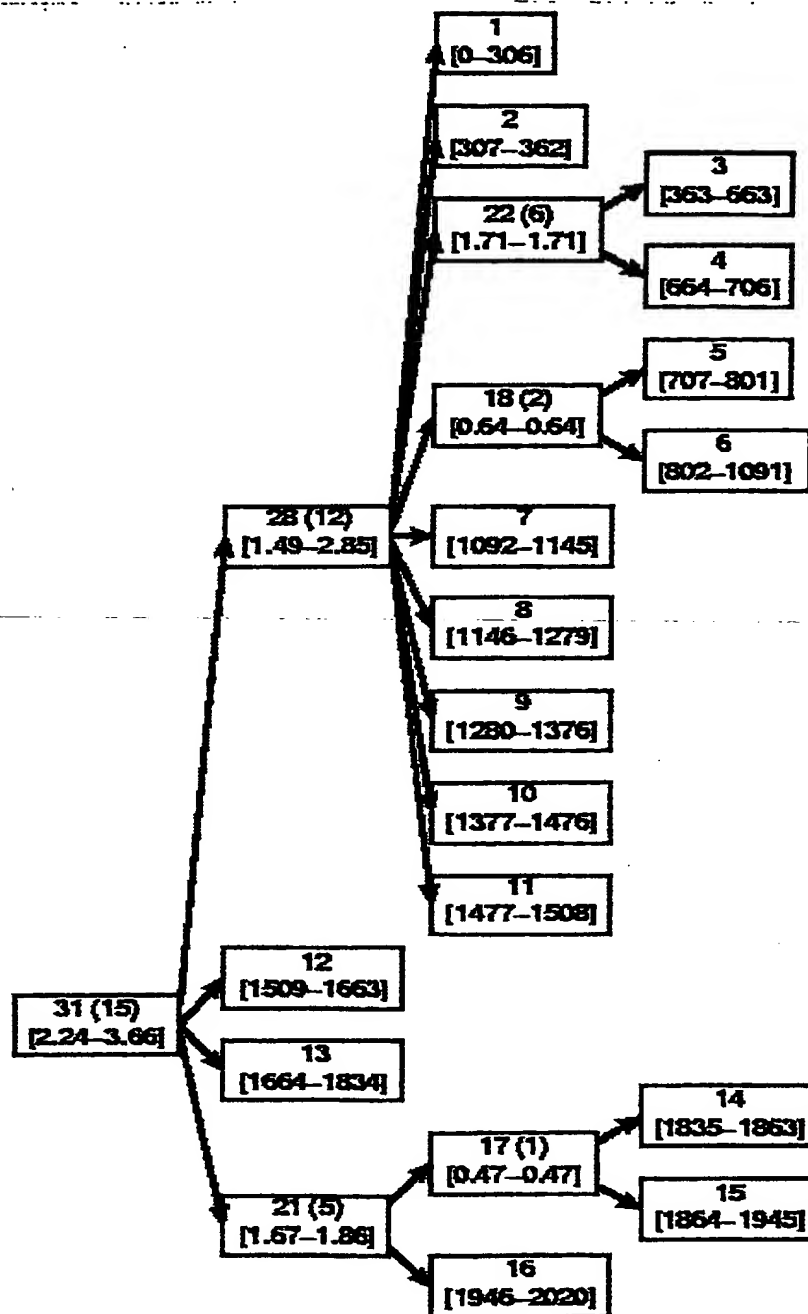


FIG. 6

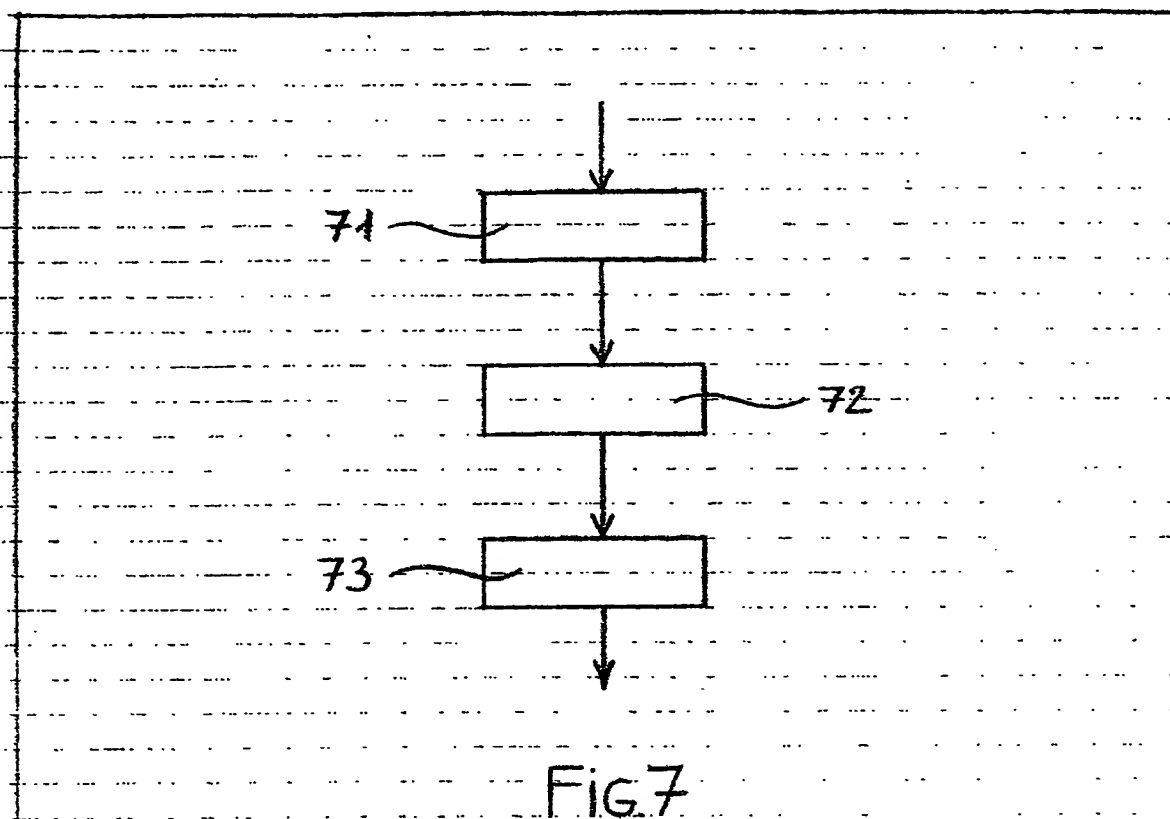

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**